


W 系列截止式换向阀

Series Poppet Valve

K22J-W 系列截止式电磁换向阀

Series poppet valves 2/2-way

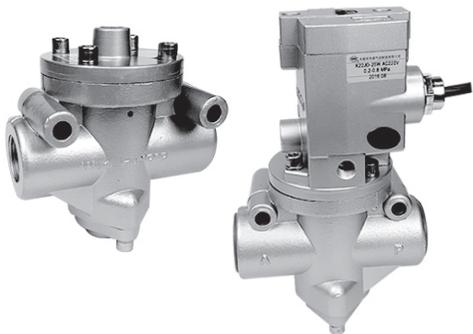

图形符号 Graphical symbols



产品特点 Features


K22J-W系列是二位二通管接截止式换向阀。该阀结构合理，动作可靠，维修方便，尤其适用于较为恶劣的工作环境。分电控和气控两种。

K22J-W series is 2/2 way poppet valve for line Mounting. Streamlined structure, reliable action easy of maintenance, and especially suites to tough work conditions. Two types: solenoid pilot control or Air remote pressure control

型号注释 Order Code

K 22 J D - 15 WHT


- 空气介质 Air medium
- 二位二通 2/2 ways
- 截止式 poppet valve
- D单电控、K单气控 D: Single solenoid pilot control K: air head for remote pressure control
- 公称通径 Dia
- W或WHT公司代号 W or WHT Company code

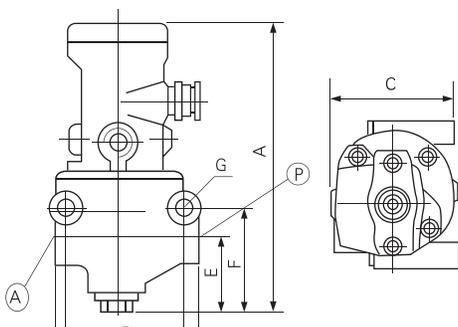

技术参数 Specification

型号 type	K22J-8W	K22J-10W	K22J-15W	K22J-20W	K22J-25W	K22J-32W	K22J-40W	K22J-50W	K22J-63W
流量 Flow rate(m ³ /h)	5	7	10	20	30	40	50	63	80
有效截面积S值 Effective sectional area(mm ²)	20	35	60	120	190	300	400	625	787.5
泄漏量 Leakage rate(cm ³ /min)	≤50	≤100	≤200	≤300	≤350	≤300	≤300	≤350	≤350
换向时间 Direction diverting time(sec)	≤0.04	≤0.06	≤0.10	≤0.15	≤0.2	≤0.15	≤0.15	≤0.2	≤0.2
切换频率 Switch-over frequency(Hz)	≥10	≥8	≥4	≥3	≥2	≥3	≥3	≥2	≥2
工作压力 Working pressure(MPa)	0.2~0.8								
电压 Voltage(V)	AC:380,220,110,36; DC:220,110,24								
工作温度 Working temp. (°C)	-5~50								

外形尺寸 Outlook & Dimension

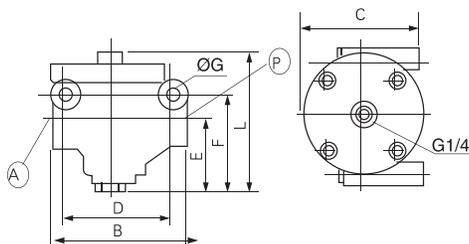

型号 Type	公称通径 Dia	接管螺纹 Threads	A	B	C	D	E	F	G	L
		英制G								
K22J-8WHT	Ø8	G1/4	169.5	89	78	71	39.5	56.5	Ø8.5	84
K22J-10WHT	Ø10	G3/8								
K22J-15WHT	Ø15	G1/2								
K22J-20WHT	Ø20	G3/4	185	113	78	82.5	45	69	Ø8.5	96
K22J-25WHT	Ø25	G1								
K22J-32WHT	Ø32	G1½	240	165	91	118	75	112	Ø13	152
K22J-40WHT	Ø40	G1½								
K22J-50WHT	Ø50	G2	307	214	142	155.5	98	147	Ø13.5	234
K22J-63WHT	Ø63	G2½								